



## 10103 – MOD rack small Platform


### Installation Instructions

#### Kit Contents:

Item	Qty	Item	Qty
Platform Latch Assembly	4	3/8" x 1" Hex bolt	16
10603 Platform	1	3/8" Nyloc nut	16
1/4" Lynch Pin	4	3/8" USS flat washer (used for both 3/8" and 7/16" bolts)	32

#### Installation Instructions:

1. Prepare the platform by attaching the quick-release latches. Attach a latch to each of the four mounting locations in the corner plates of the platform using four 3/8" x 1" Hex bolts, eight washers, and four 3/8" Nyloc nuts per latch as shown below in **Figure 1**. Place the bolts at the outer corner slots of each rectangular mounting slot pattern. Install the hardware, but do not fully tighten at this time. Tighten the hardware enough to hold the latch close to the platform corner plate, but loose enough to slide around slightly.

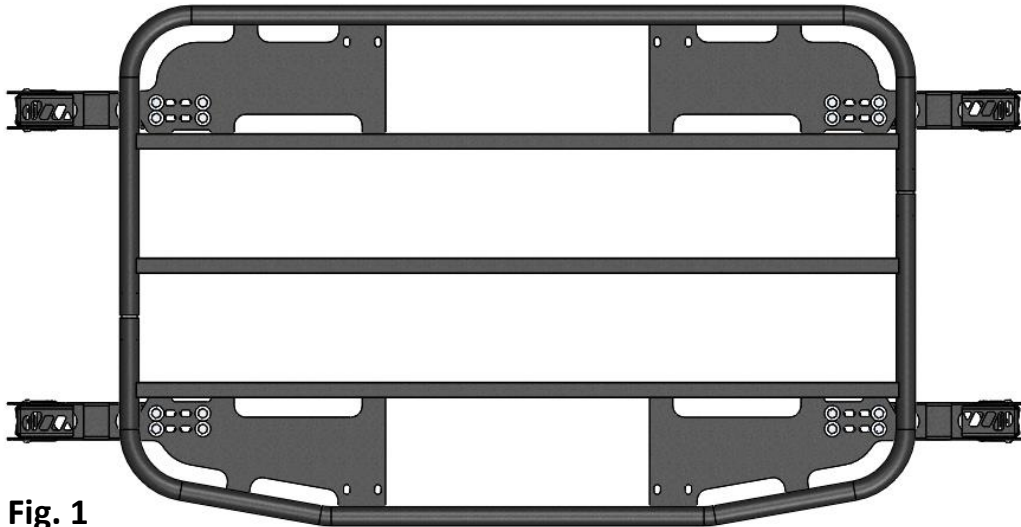

**Fig. 1**


2. To prepare the platform and latches to be lifted onto the rail, you may find it beneficial to swing the silver latch hooks all the way out and screw them against the latch handle body until they stay in position (**Fig. 2**). By tightening the latch hooks against the latch handle (screwing them in by turning clockwise), you prevent them from dangling and getting in the way when setting the latches on top of the rails.



**Fig. 2**



3. Now carefully position the platform on the sub-frame rails. The latches should still be slightly loose allowing them to move slightly so they may correctly sit on the rails. Position the platform on the MOD rails so that the latch hooks engage with the recessed notches in the MOD rail cutout as shown in **Figure 3**. (DO NOT CLAMP THE LATCH HOOK ON A RAISED TAB OF THE MOD RAIL CUTOUT!!! CLAMPING ON A RAISED TAB WILL NOT ADEQUATELY SECURE THE PLATFORM!!!)

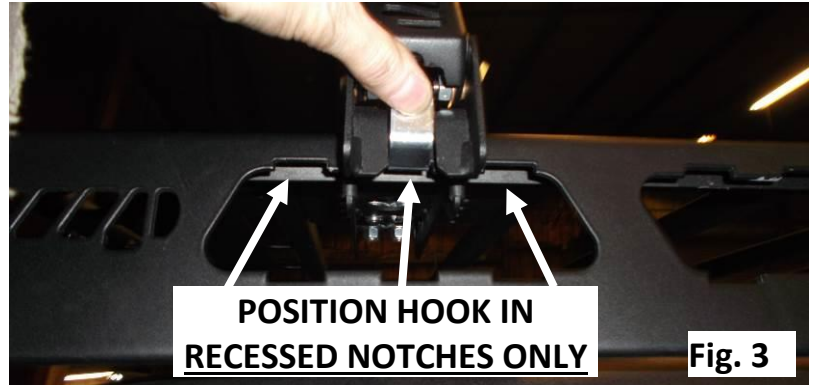

4. Now evenly position the platform and clamp the latches onto the MOD rail. You can adjust the tension of the latch by un-clamping the latch and screwing the hook in or out of the latch handle. Screwing the hook in will make the latch tighter and unscrewing the hook will make the latch looser. Adjust the hook at all four latches so that the latch handle will close with some resistance (you do not need to overtighten the latches).
5. Once all four latches are clamped down, make sure the platform is square and centered on the MOD rack sub-frame. After centering the platform, tighten the sixteen 3/8" bolts attaching the Latches to the platform, but be careful not to move the platform out of position before the hardware is tight.
6. The final installation step is to install the secondary safety on each latch. Lynch Pins have been provided (please note that they are not long enough to pass through both sides of the latch). You may use these Lynch Pins to prevent accidental opening of the MOD rail latches. You may also choose a bolt and nut combination if you prefer, or even long-shackled padlocks for increased security. (**Fig. 4**)



7. Double check that all hardware has been tightened. You may now enjoy your new Warrior Products MOD rack platform! You can position the Platform anywhere along the MOD rail, or even leave the Platform at home in the garage while not in use. With the platform removed, the soft top can be opened or closed without removing the sub-frame by folding it between the side rails.

**QUALITY** • **INTEGRITY** • **INNOVATION** • **SERVICE**