

(Box Shelf) INSTALLATION INSTRUCTIONS




Please read before beginning

- *Stainless-steel hardware may bind together when tightening—It is recommended that you apply an anti-seize assembly lubricant to the threads of each bolt before assembly*
- *This installation requires two people*

Required tools

- Standard wrench set
- Leveling tool
- Drill with 1/4" bit

Included Part/Subassemblies

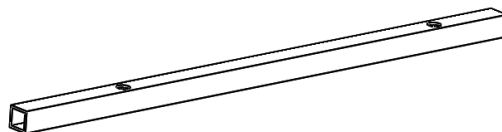

x2

Square Tube Shelf Bracket



<u>Included hardware</u>	<u>Quantity</u>
---------------------------------	------------------------

- | | |
|--|---|
| • Mounting hardware | |
| ○ 70084 8-32 Button Head Bolt Philips SS | 4 |
| ○ 70002 8-32 Washer SS | 8 |
| ○ 70001 8-32 Nylock Nut SS | 4 |
| ○ Anti-seize packet, 2g | 1 |

Installation Instructions

1. Using the supplied hardware, bolt on the square tube shelf bracket to the desired location inside the box. *Note: If you have a swing open door the shelf can not be installed between 12-1/2" and 17-1/4" it will interfere with the latch.
2. It may be easier to cut some 1x4's to hold the square tube brackets/shelf in the desired location before drilling.
3. Place the shelf on the square tube brackets, with folded lip facing up.